


EVEN ROW

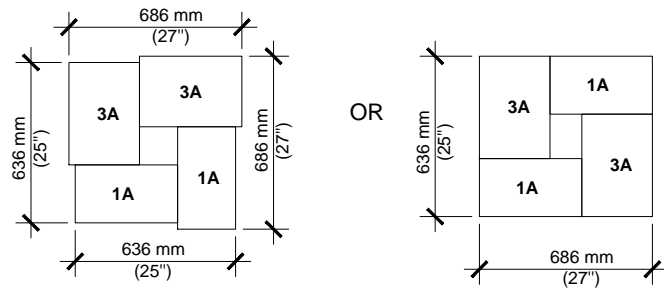

ODD ROW

NOTES:

- ALL UNITS MUST BE CUT ON FIELD
- USE A CHISEL FOR DESIRED SPLITTED TEXTURE FACE

GRAPHIX PILLARS

- A. PILLAR CAP UNIT (SECURE WITH CONCRETE ADHESIVE)
- B. GRAPHIX CORNER UNIT
SECURE EACH ROW WITH CONCRETE ADHESIVE
CUT EACH BLOCK AT 16" (406 mm) FROM THE CORNER EDGE
- C. USE THE BLOCKS 1A-3A FOR THE ODD ROWS
- D. USE THE BLOCKS 2A-4A FOR THE EVEN ROWS
- E. EMBEDMENT DEPTH 6" (150 mm) MIN.
- F. 23 5/8" (600 mm) HEIGHT PER PALLET
47 1/4" (1200 mm) MAXIMUM HEIGHT
- G. GEOTEXTILE
- H. COMPACTED GRANULAR BASE 6" (150 mm) THICK MIN.
THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS